

# HM100

## PROFESSIONAL PRESENTATION HEADSET MICROPHONE

### Features:

- High intelligibility for speech applications.
- Durable, lightweight, comfortable design.
- Excellent ambient noise control.

### Specification:


- Element : Back Electret Condenser
- Polar pattern : Uni-directional
- Frequency Range : 100Hz~12,000Hz
- Sensitivity : -66dB  $\pm$  3dB  
(0dB = 1v/ $\mu$ bar @ 1KHz)
- Impedance : 600  $\Omega$   $\pm$  30% @ 1KHz
- Operating Voltage : DC: 1.5V~10V (RL:680  $\Omega$ )
- Cable :  $\Phi$ 2.6 $\times$ 1.0M(2C+1PVC)
- Plug Options : (1) $\Phi$ 3.5mm Gold-Plated Pin Mono Plug  
(2) $\Phi$ 2.5mm Gold-Plated Pin Mono Plug  
(3)Mini-XLR  
-Pin Configuration: Pin 1-Ground  
Pin 2-Signal  
Pin 3-(+)Voitage



### Optional Plug:



### Frequency Response Graph:

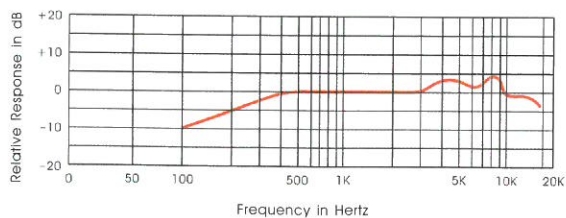

### Polar Pattern:

