

CAT5 ENHANCED 350MHz UTP CMR RATED


Cat5eCableGuy.Com

DESCRIPTION

Category-5E, 24AWG, UTP, 8C Solid Bare Copper, CMR Rated, PVC Jacket 1,000ft.

FEATURES

- High-Performance Data Cable
- 350MHz Bandwidth for Data Applications
- Category-5E Unshielded Twisted Pair
- 24AWG Solid Copper Conductors
- Easily Identified Color-Striped Pairs
- Exceeds TIA/EIA-568C.2, ISO/IEC 11801
- Riser Rated PVC Jacket, CMR
- ETL Listed, 1,000ft Pull Box

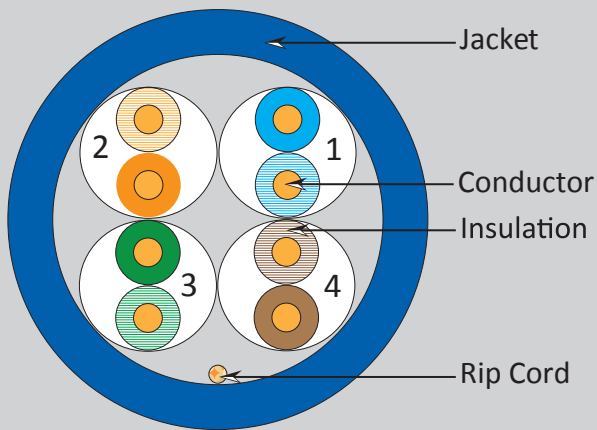

Technical Data

Rated Temperature	75 °C
Rated Voltage	30v
Product Standard Certification	CMR

Conductor

Size **Solid Bare Copper**

Insulation

Average Thickness (mm)	0.203
Min. Point Thickness (mm)	0.172
Insulation Diameter (±0.005mm)	0.88
Twisted Pair Diameter (±0.01)	1.76

Assembly Diameter

3.60

Jacket

Average Thickness (mm)	0.60
Min. Point Thickness (mm)	0.54
Outer Diameter (±0.10mm)	5.00
Rip Cord	Yes

Color of Pairs

Pair 1	Blue, White-Blue
Pair 2	Orange, White-Orange
Pair 3	Green, White-Green
Pair 4	Brown, White-Brown

Mechanical Characteristics

Test Object	Jacket
Test Material	PVC
Before Tensile Strength (Mpa)	>=13.8
Aging Elongation (%)	>=100
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket

VERTICAL 4003289 ETL VERIFIED CAT5E TO TIA-568C.2 ISO/IEC 11801:2002 CMR 24 AWG UTP c(ETL)us FT4 350MHz RoHS XXXFT (SEQUENTIAL FOOT MARKERS ON JACKET)

Jacket color available in
Blue, Black, White, Green, Gray, Red, Yellow, Orange, Pink, Purple



Cat5eCableGuy.Com
Where Quality Cable is on Sale!



CAT5 ENHANCED 350MHz UTP CMR RATED


PERFORMANCE

Electrical Characteristics:

1.0-100MHz Impedance (Ohms)	100±15
100-200MHz Impedance (Ohms)	100±15
200-350MHz Impedance (Ohms)	100±15
1.0-350MHz Delay Skew (ns/100m)	<=45
Pair-to-Ground Capacitance Unbalance (pF/100m)	<=330
Max. Conductor DC Resistance 20°C (ohms/km)	93.8
Resistance Unbalance (%)	<=5

Frequency (Mhz)	Return Loss (Min dB)	Attenuation Max	Next (ns/100m)	ACR Typ(db)
0.772	19.4	1.8	67.0	67.7
1	20.0	2.0	65.3	67.3
4	23.0	4.1	56.3	56.2
8	24.5	5.8	51.8	50.0
10	25.0	6.5	50.3	47.8
16	25.0	8.2	47.3	44.0
20	25.0	9.3	45.8	41.5
25	24.3	10.4	44.3	38.9
31.25	23.6	11.7	42.9	36.2
62.5	21.5	17.0	38.4	27.4
100	20.1	22.0	35.3	19.3
200	18.0	32.4	30.8	3.5
300	16.8	41.0	28.2	-----
350	16.3	44.9	27.2	-----

Frequency (Mhz)	PSNext (Min dB)	ELFEXT Min(db/100m)	PSELFEXT Min(db/100m)
0.772	64.0	66.0	63.0
1	62.3	63.8	60.8
4	53.3	51.7	48.7
8	48.8	45.7	42.7
10	47.3	43.8	40.8
16	44.3	39.7	36.7
20	42.8	37.7	34.7
25	41.3	35.8	32.8
31.25	39.9	33.9	30.9
62.5	35.4	27.8	24.8
100	32.3	23.8	20.8
200	27.8	17.7	14.7
300	25.2	14.2	11.2
350	24.2	12.9	9.9



Cat5eCableGuy.Com
Where Quality Cable is on Sale!

Rev. 08/2014

Subject to change without notice.